






9600S Series Sockets

.050 [1.27] Low Profile Socket


Specifications

Insulator Material: Glass filled polyester, Thermoplastic,
 94V-O Nylon-6T, UL Recognized.
 Contact Material: Phosphor Bronze
 Contact Plating: Gold and/or Tin over .000050" Ni
 (See contact plating options)
 Insulation Resistance: 5000 M ohms min.
 Contact Resistance: 20 m ohms max.
 Dielectric Withstand Voltage: 500 VAC
 Current Rating: 1 AMP
 Operating Temperature: -40°C To +105°C
 Max Operating Temp.: 230°C for 60 seconds
 UL File Numbers: E146967 & E176234

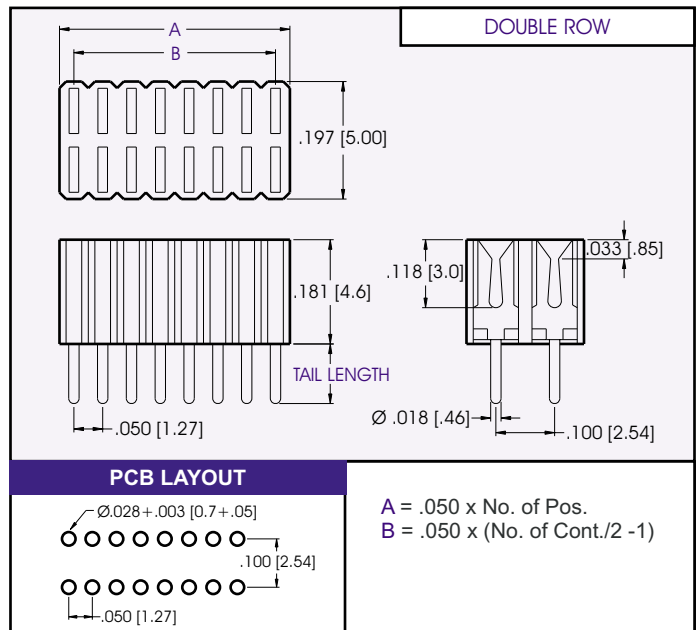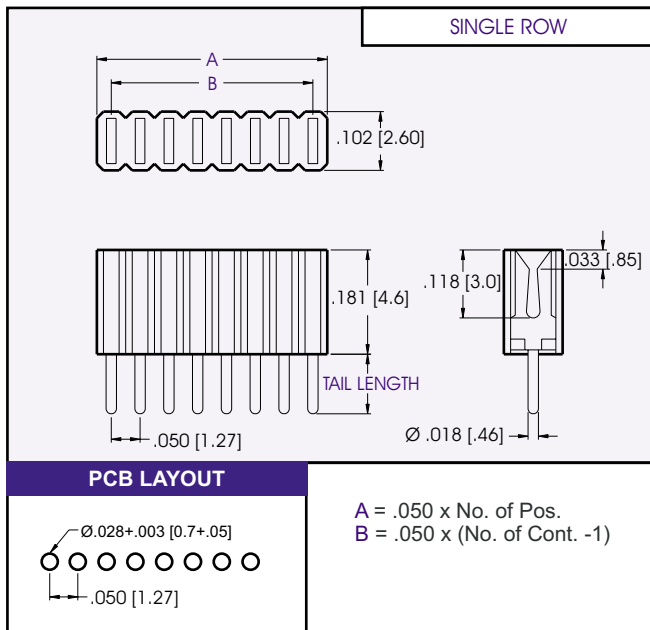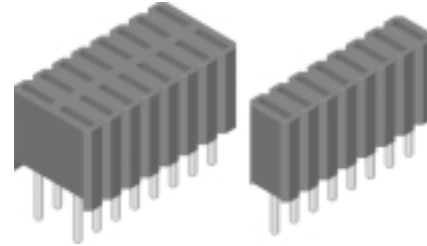

DIMENSIONS ARE IN INCHES [MM]

PART NUMBERING

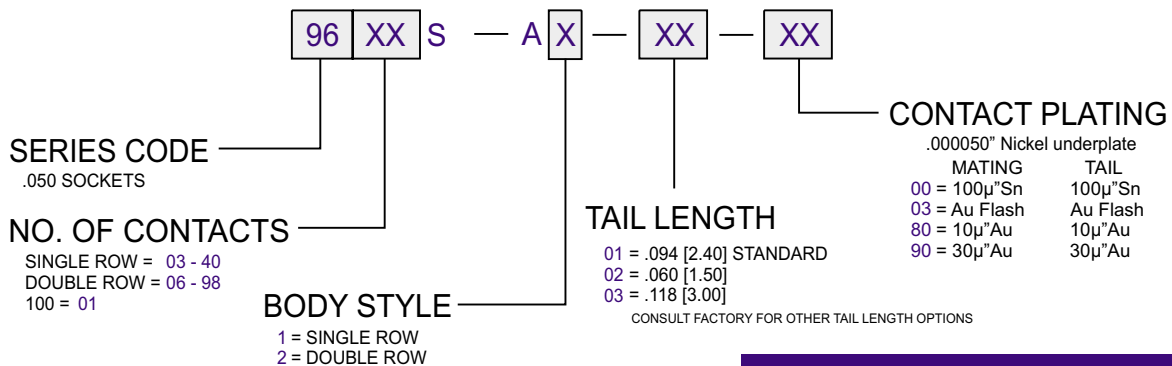

SUGGESTED MATING CONNECTORS

SINGLE ROW:		DOUBLE ROW:	
96XX-AX-01-XX	(F-05)	96XX-JX-X1-XX	(F-14)
96XX-BX-01-XX	(F-06)	96XX-K1-01-XX	(F-15)
96XX-CX-01-XX-XXX	(F-07)	96XX-C2-01-XX-XXX	(F-07)

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION