

9800S Series Sockets .039 [1.00] SMT Strip Socket

Specifications

Insulator Material: LCP 94V-O UL Recognized.

Contact Material: Phosphor Bronze
Contact Plating: Gold over .000050" Ni


(See contact plating options).

Insulation Resistance: 5000 M ohms min.

Dielectric Withstand Voltage: 500 VAC
Current Rating: 1 AMP


Operating Temperature: -40°C To +105°C Contact Resistance: 20 m ohms max.

Max. Processing Temp.: 230°C for 60 seconds
UL File Numbers: E146967 & E176234



SUGGESTED MATING CONNECTOR

98XX-AX-01-XX (PAGE F-01)

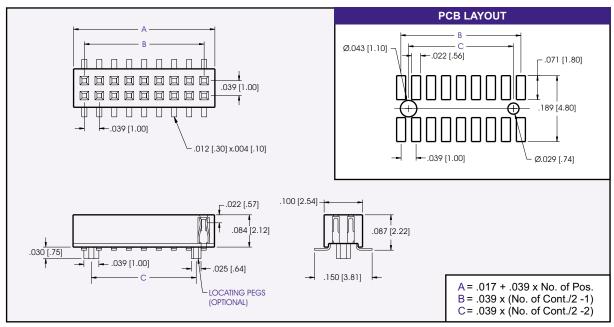

DIMENSIONS ARE IN INCHES & [MM]

