




9000 Series Header .045 Square Strip Headers



Specifications

Insulator Material: Glass filled polyester, Type PBT,
 94V-O, UL Recognized.
 Contact Material: Copper Alloy
 Contact Plating: Gold and Tin over .000050" Ni
 (See contact plating options.)
 Insulation Resistance: 5000 M ohms min.
 Dielectric Withstand Voltage: 1500 VAC
 Current Rating: 5 AMPS at 30°C
 Operating Temperature: -40°C To +105°C
 Hole Size Requirements:
 Drilled Hole Diameter: .0773±.001
 Plating: .001 to .003 copper and
 .0001 to .0008 solder
 Finished Hole Diameter:
 .072±.003
 UL File Numbers: E146967 & E176234

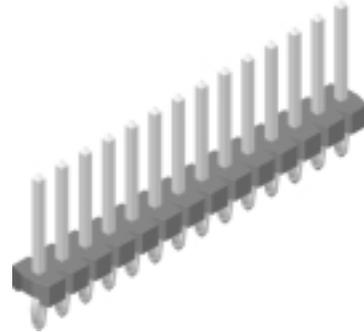


APPLICATION TOOLING FOR PRESS-FIT HEADERS

PART NUMBERING

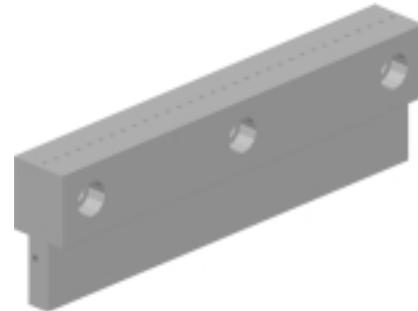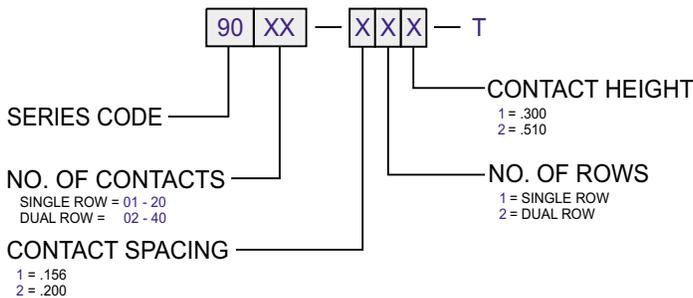


PART NUMBERING

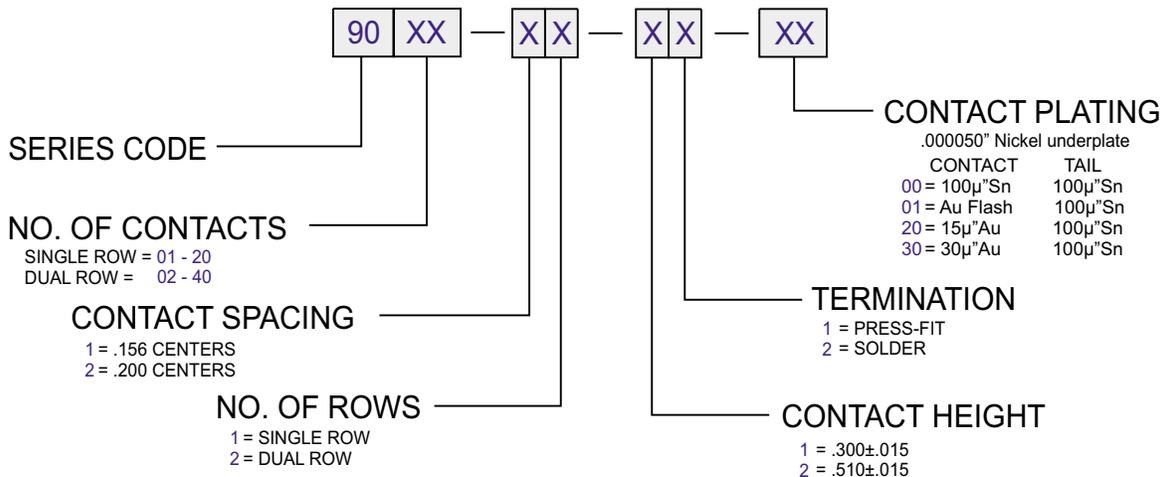


CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION

.156 X .200 CENTERS

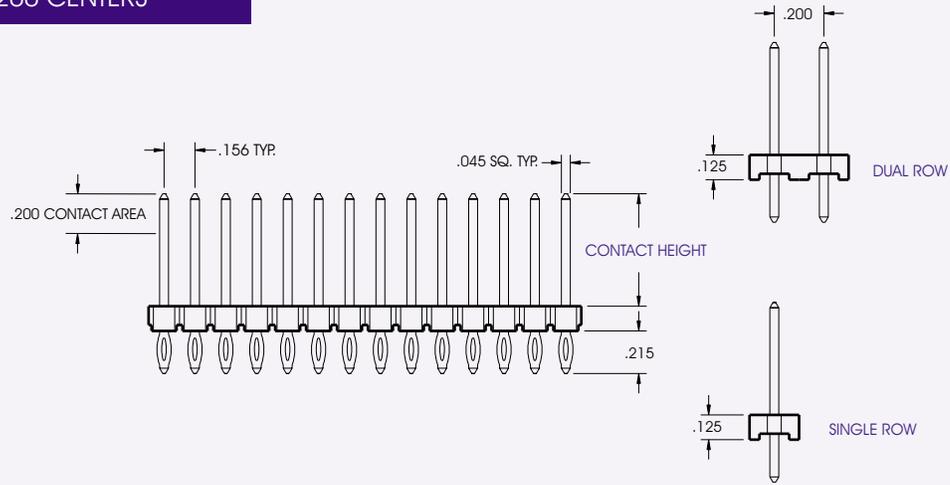


.200 X .200 CENTERS

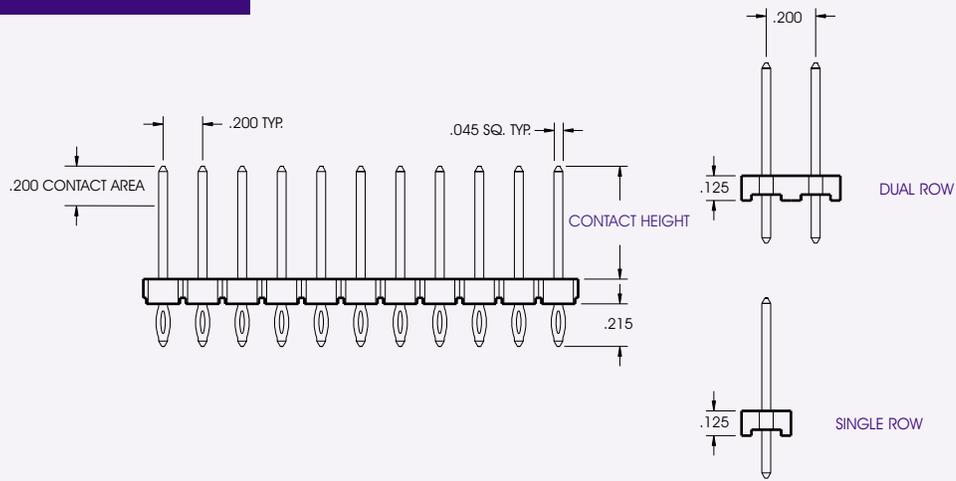


RECOMMENDED PC BOARD LAYOUTS

.156 X .200 CENTERS

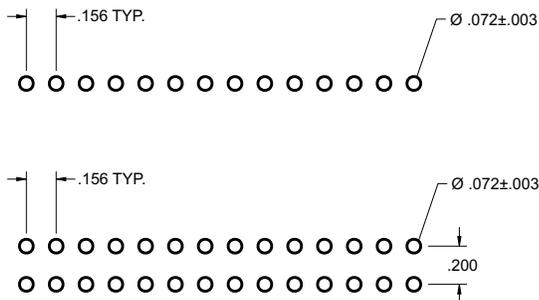

.200 X .200 CENTERS

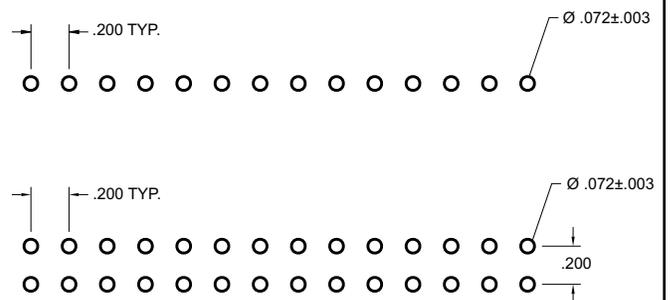

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION