


MCA CARD EDGE CONNECTOR, SOLDER TAIL

0.050" [1.27mm] CONTACT CENTER



Specifications

- Accommodates .062 ± .008 PC Board
- Ryton or Thermx insulator
- 1 amp current rating
- Insulation Resistance: 5000 M Ω min.
- Dielectric Withstand Voltage: 250 VDC
- Voltage Drop: 30 m volt at rated current
- Contact Resistance: 30 m Ω max. at rate current
- Board Insertion Force: 16 oz. max. per contact pair using .062 [1.58mm] thick steel test blade.
- Board Withdrawal Force: 1 oz. Min. per contact pair using .062 [1.58mm] thick steel test blade.
- Operating Temperature: -54° to 125° C

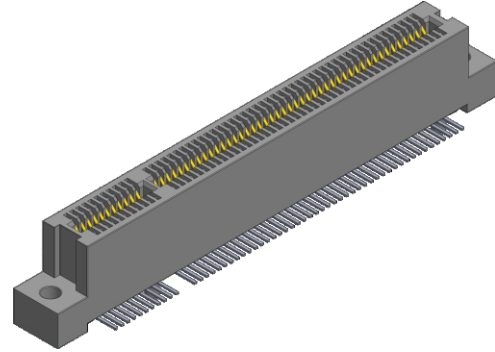


Recognized under the recognized component Program of Underwriters Laboratories, Inc. File Numbers: E176234





For drawings, technical data or samples, contact E.C.S. at (714) 750-9410

MOUNTING STYLES			TERMINATION TYPES		
1 = No Mounting Ear	2 = Flush Mount	3 = #4-40 Threaded Insert	1 = Staggered Dip Solder	2 = Card Extender	3 = Surface Mount

PART NUMBERING

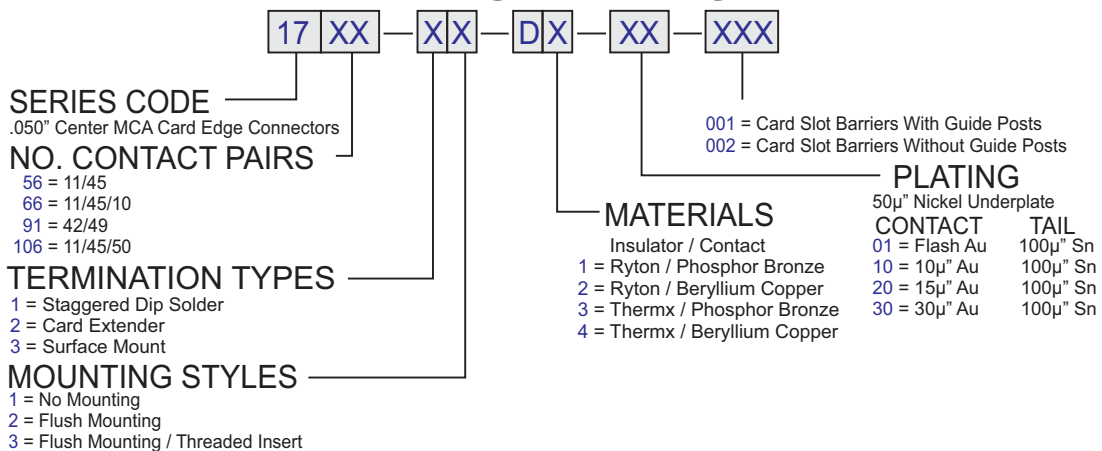

.050 [1.27] Contact Centers, MCA Card Edge Connector

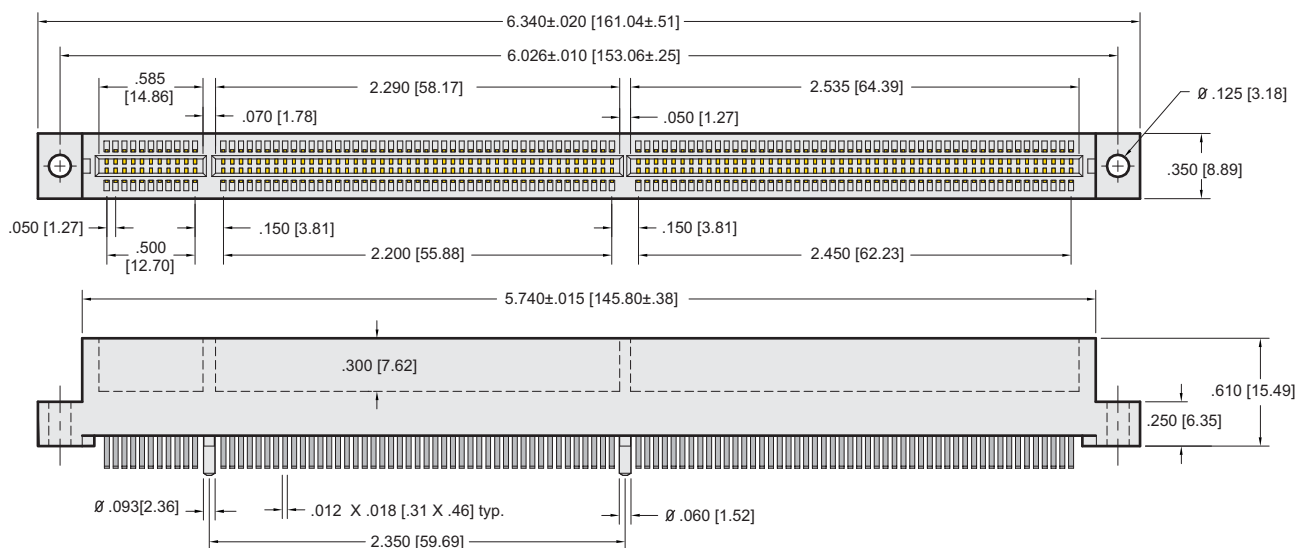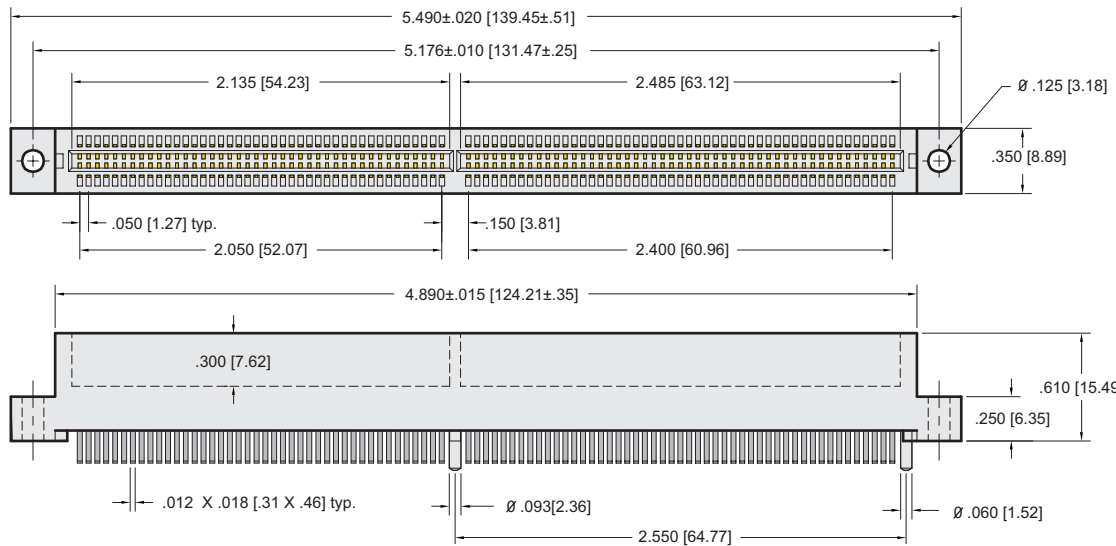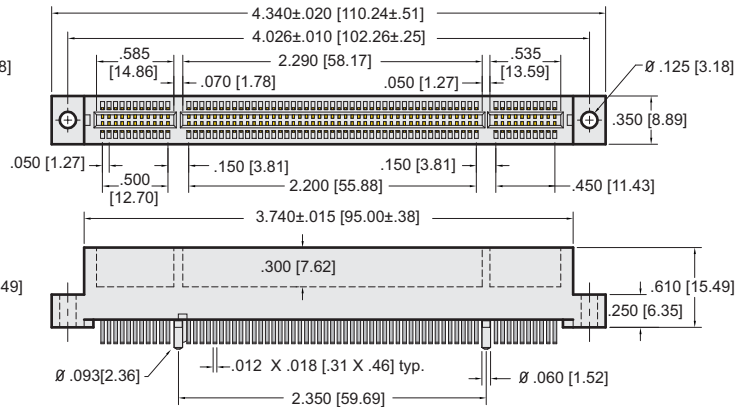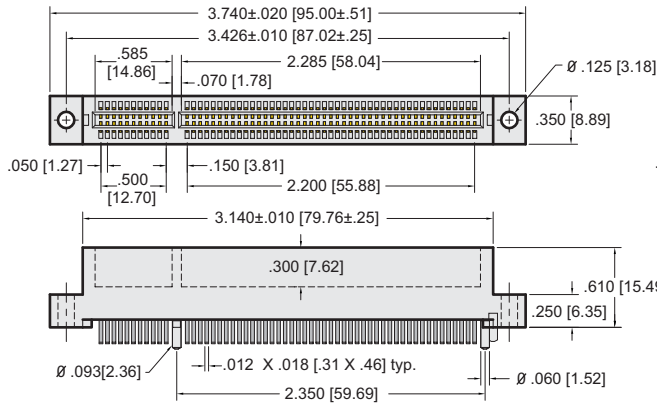

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION