





7300 Series Futurebus 4 Row Right Angle Female Power

Specifications


Insulator Material: Liquid Crystal Polymer (LCP)
94V-O, UL Recognized.
Contact Material: Phosphor Bronze
Contact Plating: Gold and Tin over .000050" Ni
(See contact plating options)
Insulation Resistance: 1000 M ohms min.
Contact Resistance: 30 m ohms max.
Dielectric Withstand Voltage: 1000 VAC
Current Rating: 3 AMP
Operating Temperature: -65°C To +125°C
UL File Numbers: E146967 & E176234

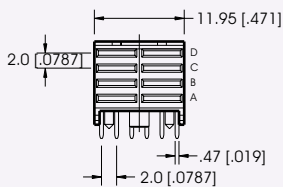


SOLDER TAIL

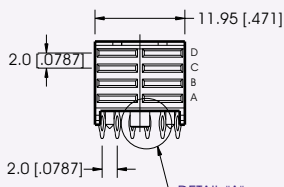


PRESS FIT TAIL




DETAIL "A"




DETAIL "B"



DETAIL "C"




DETAIL "B"

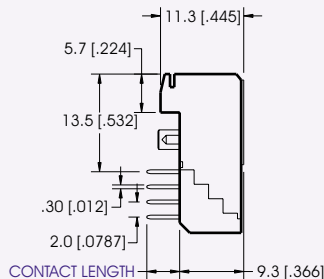

CONTACT LENGTH

PCB LAYOUT

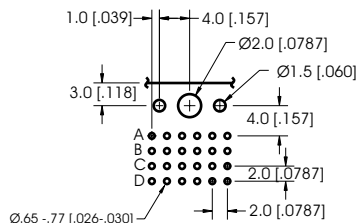

DIMENSIONS ARE IN MM & [INCHES]

PART NUMBERING

