






9400S Series Sockets

.079 [2.00] Straight & R/A Sockets


Specifications

Insulator Material: Glass filled polyester, Thermoplastic,
 94V-O Nylon-6T, UL Recognized.
 Contact Material: Phosphor Bronze
 Contact Plating: Gold and/or Tin over .000050" Ni
 (See contact plating options)
 Insulation Resistance: 5000 M ohms min.
 Dielectric Withstand Voltage: 500 VAC
 Current Rating: 1 AMP
 Operating Temperature: -40°C To +105°C
 Contact Resistance: 20 m ohms max.
 Max Processing Temp.: 230°C for 30 seconds
 UL File Numbers: E146967 & E176234

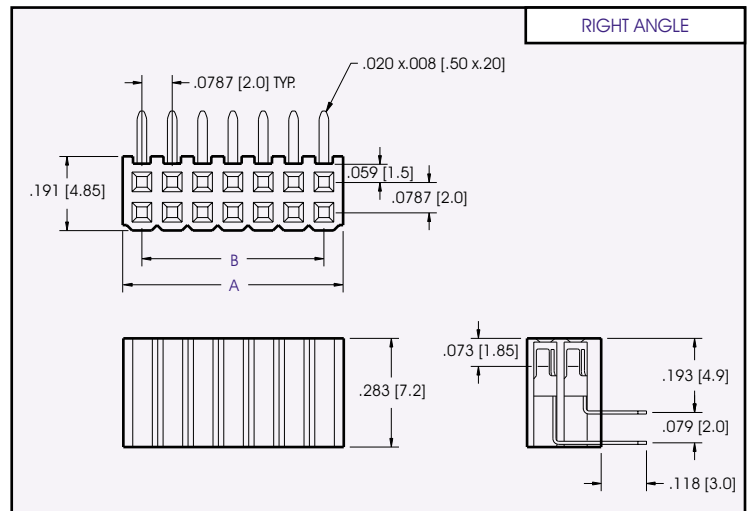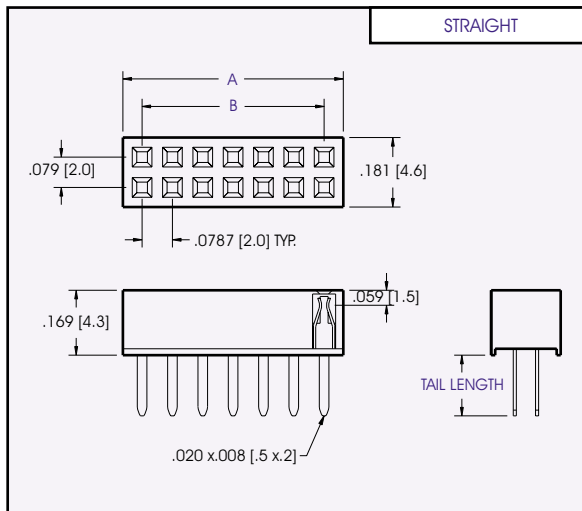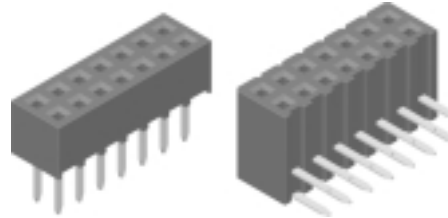


DIMENSIONS ARE IN INCHES & [MM]

SUGGESTED MATING CONNECTORS	
94XX-BX-XX-XX	(PAGE F-22)
94XX-DX-XX-XX	(PAGE F-23)
94XX-EX-XX-XX-X	(PAGE F-24)

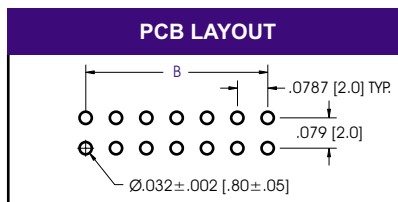

$A = .020 + .0787 \times \text{No. of Pos.}$
 $B = .0787 \times (\text{No. Of Cont./2} - 1)$

PART NUMBERING

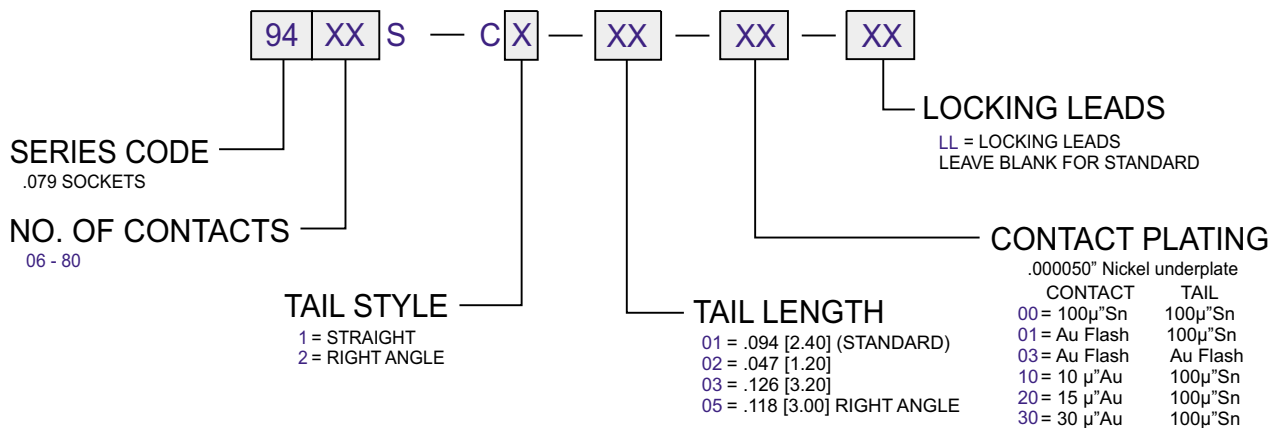

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION