





9400S Series Sockets

.079 [2.00] Low Profile Socket

Specifications


Insulator Material: Glass filled polyester, Thermoplastic,
94V-O Nylon-6T, UL Recognized.
Contact Material: Phosphor Bronze
Contact Plating: Gold or Tin over .000050" Ni
(See contact plating options)
Insulation Resistance: 5000 M ohms min.
Dielectric Withstand Voltage: 500 VAC
Current Rating: 1 AMP
Operating Temperature: -40°C To +105°C
Contact Resistance: 20 m ohms max.
Max Processing Temp.: 230°C for 60 seconds
UL File Numbers: E146967 & E176234

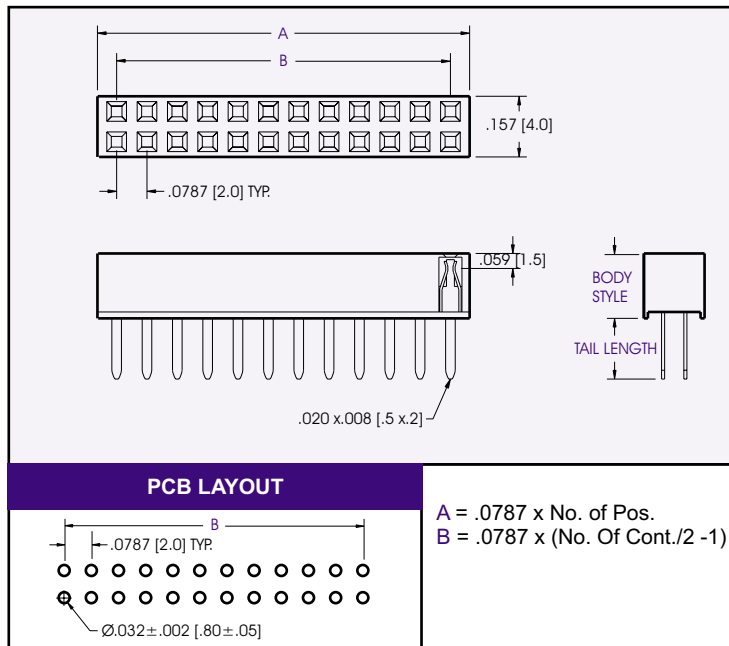

SUGGESTED MATING CONNECTORS	
94XX-BX-XX-XX	(PAGE F-22)
94XX-DX-XX-XX	(PAGE F-23)
94XX-EX-XX-XX-X	(PAGE F-24)
94XX-GX-XX-XX-X	(PAGE F-26)

DIMENSIONS ARE IN INCHES & [MM]

PART NUMBERING

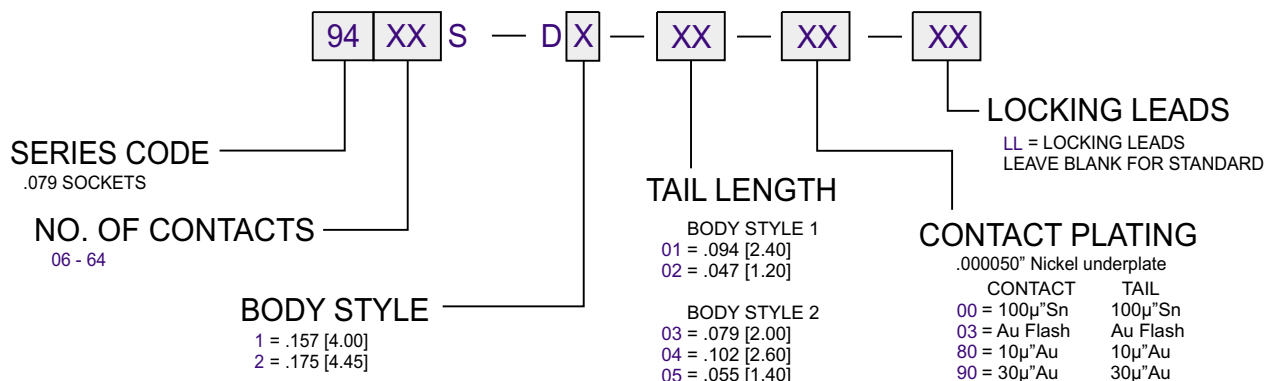

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION