

# .100 [2.54] SOCKET, SIDE ENTRY





## Specifications

|                          |                          |
|--------------------------|--------------------------|
| Current Rating:          | 3 Amps                   |
| Insulator Resistance:    | 5000 Megohms min         |
| Contact Resistance:      | 20m ohms max             |
| Dielectric Withstanding: | AC 1000V                 |
| Operating Temperature:   | -40° ~± 105° C           |
| Contact Material:        | Phosphor Bronze          |
| Insulator Material:      | Polyester, UL 94V-0, PBT |
| Finish:                  | See Contact Plating      |




Recognized under the recognized component Program of Underwriters Laboratories, Inc. Products specifications are subject to be changed without notice.

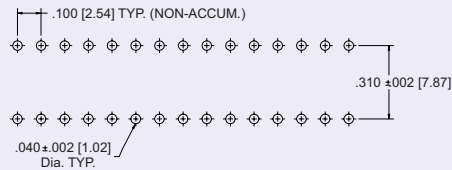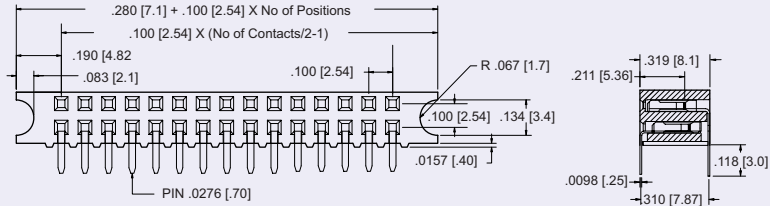


Recommended P.C.B Layout

Dimensions are in inches [mm]

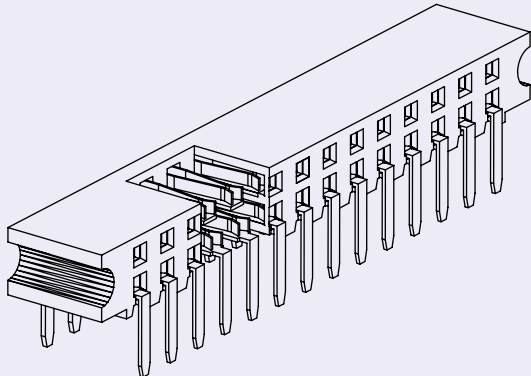

## PART NUMBERING



SERIES CODE

NO. OF CONTACTS

10, 20, 30, 40, 60

CONTACT PLATING

Lead Free & RoHS Compliant

.000050" Nickel underplate

CONTACT TAIL

03 = Gold Flash

80 = 10µ" Gold

85 = 15µ" Gold

90 = 30µ" Gold

70 = 100µ"Sn

75 = Au Flash 100µ" Sn

15 = 10µ" Au 100µ" Sn

25 = 15µ" Au 100µ" Sn

35 = 30µ" Au 100µ" Sn

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR DESIGN