

.100 [2.54] SOCKET, SIDE ENTRY TYPE






Specifications

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohm max
 Dielectric Withstanding: AC 1000V
 Operating Temperature: -40° ~± 105° C
 Max Processing Temp: 230° C to 60 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0, PBT
 Finish: See Contact Plating




Recognized under the recognized component Program of Underwriters Laboratories, Inc.
 Products specifications are subject to be changed without notice.

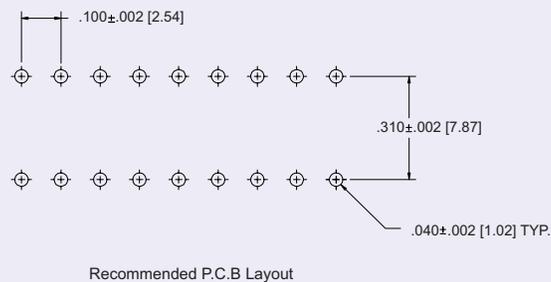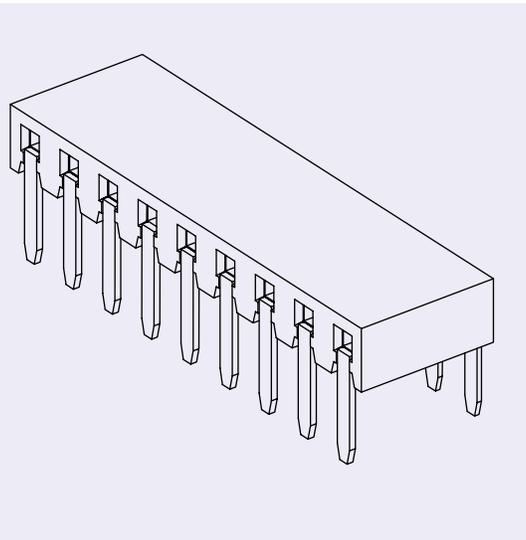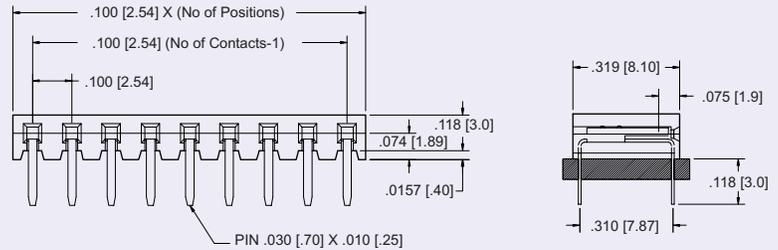

Dimensions are in inches [mm]

PART NUMBERING

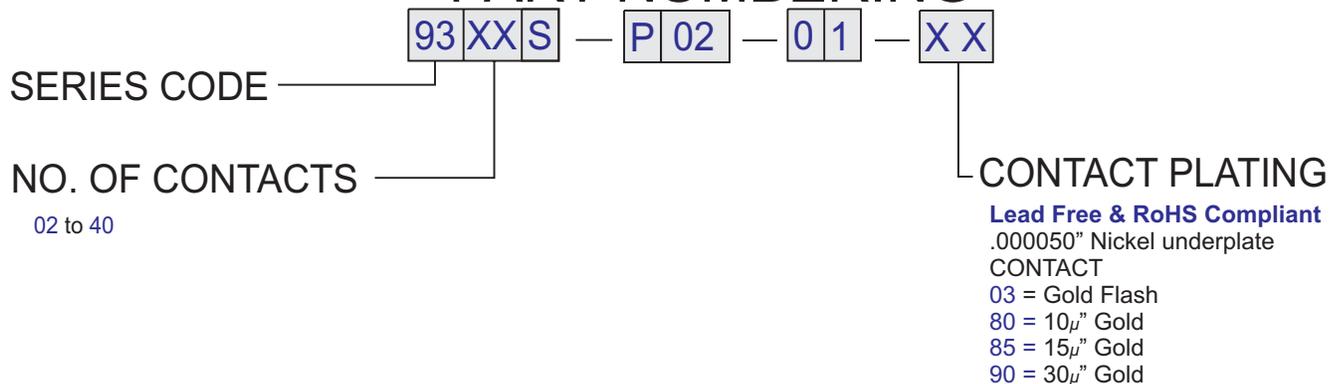

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR DESIGN