
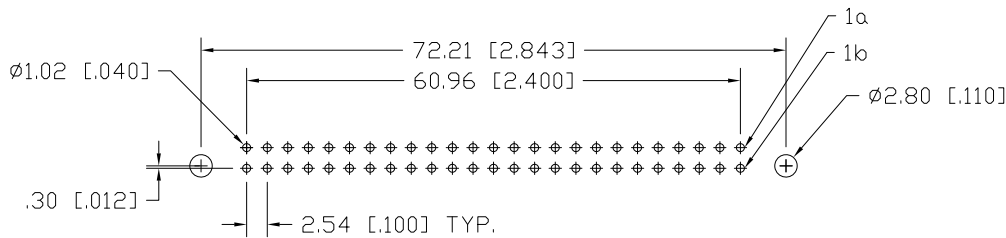

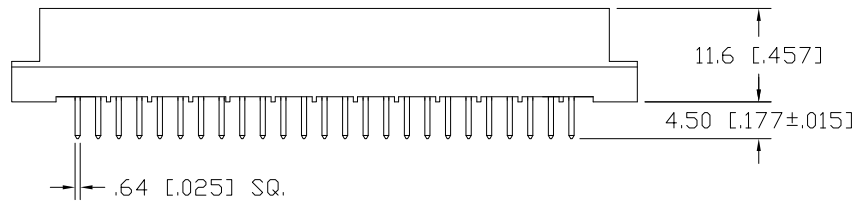



SPECIFICATIONS :

1. Insulator Material: glass filled polyester, type PBT, 94 V-0, UL Rated.
2. Contact Material: Phosphor Bronze Alloy CA510
3. Insulation Resistance: 5000 M ohms min.
4. Dielectric Strength: 1000 VDC
5. Temperature Rating: -60°C to 125°C
6. Contact Resistance: 20 milliohms max.
7. Current Range: 3 Amps
8. Contact Plating:
Mating area: Class 1
Tail: Matte Tin
9. Hole Size Requirements:
Drilled Hole Dia.: 1.151 [.0453±.001]
Plating: .025-.076 [.001-.003] copper and .0076 [.0003] min. Tin
10. Finished Hole Diameter: 1.02±.076 [.040]

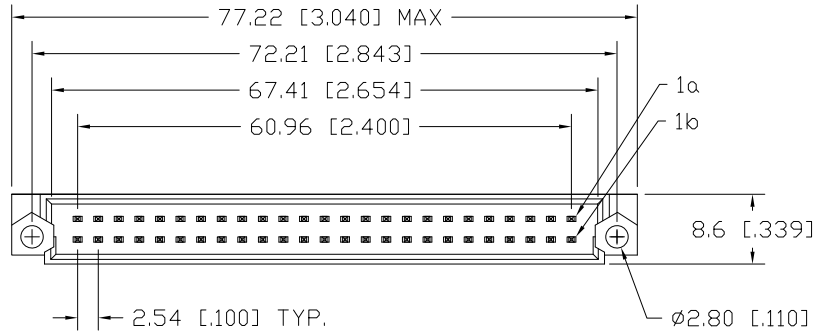

P.C.B. LAYOUT

REV.	DATE	CHK	DESCRIPTION
			Email: custsvc@ecscconn.com Orange County, California
www.ecscconn.com			

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.		DRAWN BY: CT	DATE 8.3.20	DESCRIPTION
DIMENSIONS:	UNLESS OTHERWISE SPECIFIED:	CHECKED BY:	DIN 41612 TYPE Q MALE	
MM [INCHES]	TOLORANCE: .00 ±.008 .000 ±.005 .0000 ±.001	APPROVED BY:	50 CONTACT, 4.50mm SOLDER TAIL LENGTH	
THIS DRAWING AND SPECIFICATIONS HEREIN, ARE THE PROPERTY OF ECS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN CONSENT OF ECS, INC.		SIZE A	PART NUMBER 60-351-2611	REV. A
SCALE NONE		PATH \\ECS\CUSTOMER PRINTS\6000SER\		SHEET 1 of 1